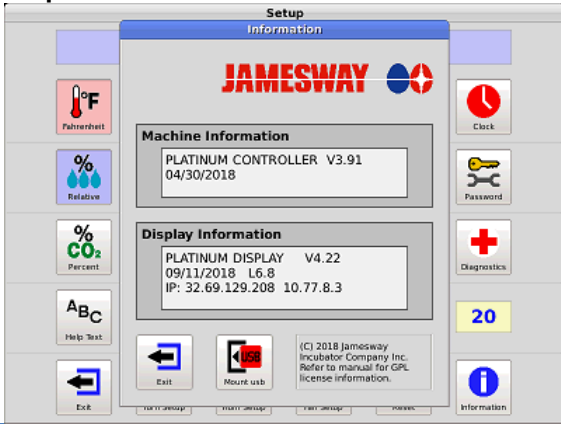
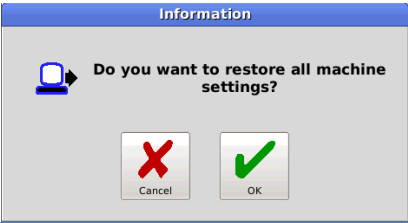
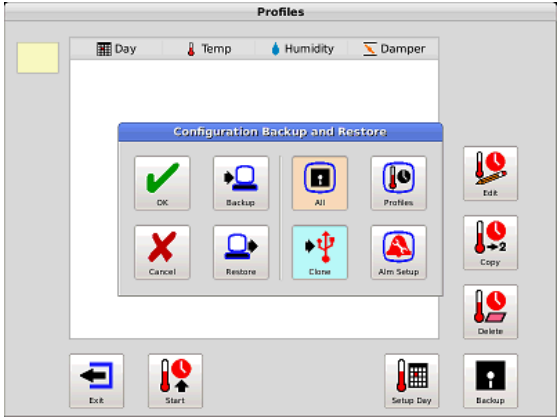


Platinum 4.22 Software USB Transfer

Platinum software version 4.22 and newer can store machine settings on a USB drive and transfer to other machines should the machine network not be available or ready.

| Image | Step |
|--|---|
| <p>Step 1</p> | <p>Insert a USB memory stick into the display's USB port.</p> |
| <p>Step 2</p>  | <p>Navigate to the <i>Information</i> Screen.</p> <p>Press the Mount USB button.</p> <p>This button will appear red if there is Platinum program information on the stick, otherwise it will appear green.</p> |
| <p>Step 3</p>  | <p>If the USB contains the settings you would like to transfer to the machine, press OK. Once the transfer has been completed, the USB key can be removed.</p> <p>If the USB is to be programmed using the settings from the machine, press Cancel.</p> |
| <p>Step 4</p>  | <p>Navigate to the <i>Profiles</i> screen.</p> <p>Choose Backup and then Clone and press OK. This will copy all machine settings to the USB memory stick. Once the backup screen closes, wait a few seconds and then remove the USB stick.</p> |
| <p>Step 5</p> <p>Use steps 1-3 to transfer the information to additional machines.</p> <p>Note: Settings will only transfer to machines of the same type of both species and machine (i.e. chicken incubator to chicken incubator). Separate settings clones will be required for different types of machines.</p> | |